

MOULDED CABLE CONNECTORS FOR IP 65

**Connectors to DIN 43650 A
2 Poles + Earth**


Housing	Black—PA + 30% GF
Contact Holder	Black—PA + 30% GF
Cable Type	PVC H05-WF
Nominal Cable Ø	6 mm
Contact Material	Cu Zn (Ag)
Max Current	16A
Operating Current	10A
Pin Spacing	18 mm
Wire X Section	3 x 0.75 mm
Insulation Class	C—VDE 0110
Working Temperature	-40 ~ +125 °C
Profile Gasket	Thermoplastic Rubber



Circuit	Part Number	Operating Voltage	LED Colour
		AC / DC	
None	AB2AA1U2**	250V /300V	N/A
Light Emitting Diode	AB2BR1U2**	10 ~ 50 V	Red
Light Emitting Diode	AB2CR1U2**	70 ~ 250 V	Red
Protection Diode	AB2LA1U2**	250V /300V	N/A
Protection Diode & LED	AB2MR1U2**	10 ~ 50 V	Red
Protection Diode & LED	AB2NR1U2**	70 ~ 250 V	Red

Note: ** Cable Length in dm.
eg Non Circuit type 1 mtr long = **AB2AA1U210**

Dimensions

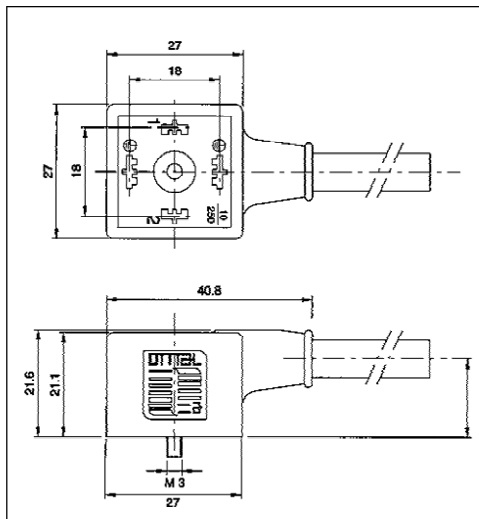

Options

Colour	Grey
Protection	IP67
Cable Types	Twin, Quad

