

DIRECT MOUNT BANJO SOLENOID VALVE G¹/₈ ~ G¹/₄

**Water, Neutral Liquids, Light Oils
Air, Inert Gases**


Wetted Materials	ENPL Brass CW614N EN 12165, Stainless Steel, FKM (Main Seal)
Ambient Temperature	-10 ~ +50 °C
Media Temperature	-10 ~ +130 °C
Media Viscosity	21 mm ² /s Max
Electrical	AC 16VA Inrush AC 10VA Holding DC 7W
Protection	IP65 with Connector
Inlet Connection	6mm OD Tube



3/2 Normally Closed
For use with Open & Closed Systems

Connection	Part Number	Orifice	Operating Pressure Differential—bar			Flow (kv) l/min	Weight kg
			Min	AC	DC		
G ¹ / ₈	B356CVCMK	1.5	0	10	10	0.7	0.25
G ¹ / ₄	B326CVCMK	1.5	0	10	10	0.7	0.25

Standard Voltages: DC: 24V ; AC: 24V 50Hz, 110V 50Hz, 230V 50Hz.
Other Voltages available to Special Order.

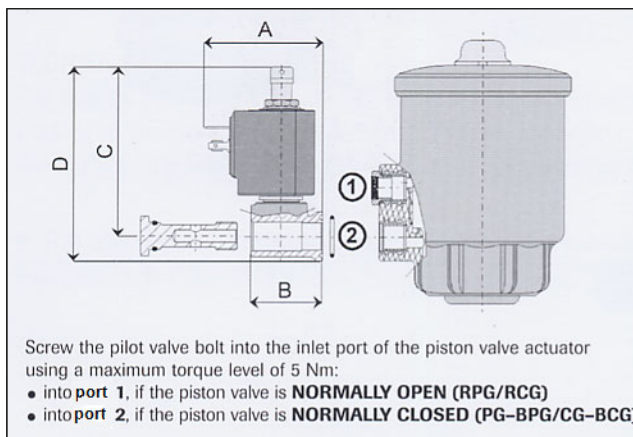

Dimensions

mm	A	B	C	D
G¹/₈	48	31	66.5	76.5
G¹/₄	51.5	34.5	66.3	78.3

Spares Kits

FKM	B010CVH

Options—Change codes as follows
